


# CONVEYING

## Auto Loader

### Model


**A L - 0 7 0 8 (C)**

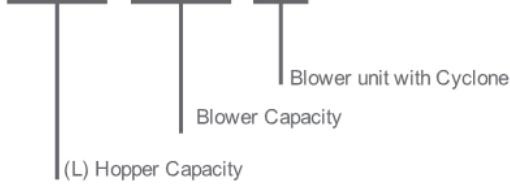

### AL - Series Specification


Model	Standard	AL-0208 (C)-KI	AL-0508 (C)-KI	AL-0519 (C)-KI	AL-1034 (C)-KI
Hopper Capacity (L)		2,5	5		10
Dumper Structure		Metal Dumper			
Blower Capacity (kw) (50/60Hz)		0,55/0,85	0,55/0,85	1,3/1,9	2,3/3,4
Level Sensor For Material Full		Magnetic Sensor			
Power Supply (KVA) (50/60Hz) (AC200V/200, 220V 50Hz/60Hz) 3 Phase (AT)		0,55/0,85	0,55/0,85	1,3/1,9	2,3/3,4
Accessories	PVC Flexible Hose	Ø38 x 10M x 1Roll			
	Suction Pipe	Ø38 x 650 x 1pcs			
	Cable	Power Cable 5M, Signal Cable 5M			
Painting Color		JPMA Y15-85A Semi Gloss			
Weight	Hopepr Unit (kg)	3,5	4,5	5,7	8
	Blower Unit (kg)	41	41	57	75

Conveying

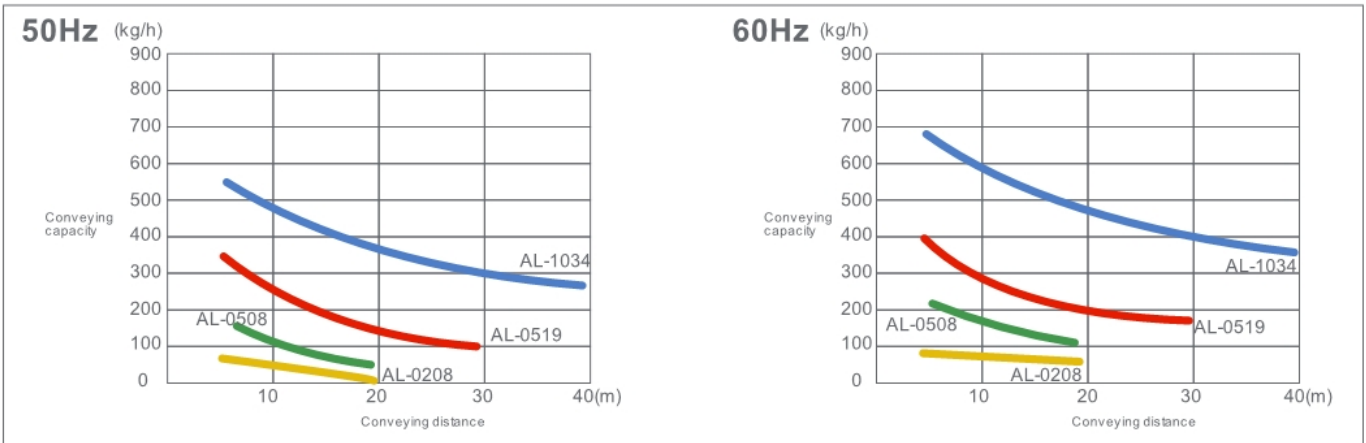


\*Conveying capacity is under the condition that the bulk density of the pellet is 0.6.  
\*4m in a vertical position is included in the whole conveying distance.  
\*Conveying capacity for the bags filter is lower than above capacity by 20%.

### Dimension All Hopper



Model	AL-02-KI	AL-05-KI	AL-10-KI
A	215	215	325
B	370	500	565
C	280	345	375
Sensor	Magnet Sensor		
Pipe Size	Ø 38	Ø 38	Ø 38

### Cyclone with dust collection tank

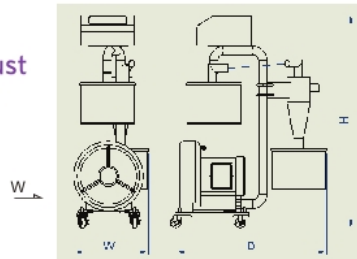

Model	BU-08 (C)-KI	BU-19 (C)-KI	BU-34 (C)-KI
W (mm)	348	375	393
D (mm)	735	741	821
H (mm)	1057	1063	1068
Weight (kg)	46	62	79

### Option

#### Auto Selector

